

## Product info

The annular space seal Hydrocord™ UKP FL with a special, wider flange on one side, designed for special cases to fix the seal with significant hydrostatic pressure. This seal is the optimal product to seal penetrations for pipelines of various purposes (gas, water, sewage) and the cables from pressure and non-pressure groundwater. Compression plates are made of stainless steel.

Hydrocord™ UKP FL can be detachable - Split version, which is used for already installed pipes and when it is not possible to mount the seal from the pipe end.

## Advantages

- Proven water resistance up to 5 bar;
- Installation does not depend on ambient temperature;
- Instrumental quality control (Dynamometric wrench);
- Gas and waterproof;
- Quick installation;
- Durability;
- Can be customized to any size and modification;
- Can be adjusted for contact with oils and oil products (made of oil and petrol resistant rubber);
- Application in contact with potable water is possible (modification with food grade rubber);
- Modification with an extended operating temperature range (from - 60°C to + 200°C) made of silicone rubber is available.

Annular space seal Hydrocord™ UKP FL-K with a special flange on one side is designed to fix the seal with fasteners to the enclosing structure. And also, for joining the seal with external waterproofing through a special butyl rubber tape.

## Application

Hydrocord™ UKP FL (FL-K) seal is used for sealing and waterproofing penetrations of sewerage, water supply, heat supply and other networks through the enclosing structures of buildings (usually monolithic or prefabricated reinforced concrete walls and ceilings), as well as for sealing penetrations of networks in cases during trenchless laying of pipes.

The principle of seal operation is the expansion of the sealing element (rubber core), under the compressive force of the pressure steel plates when tightening the bolts that unite the structure.



LLC "Plant of waterproofing materials "Hydrocord"  
Yekaterinburg, Krestinskogo St. 46a, office 401  
Phone: +7 (343) 222-73-22

Web: [hydrocord.ru](http://hydrocord.ru) E-mail: [ukp@gydromix.ru](mailto:ukp@gydromix.ru)



Product info on the website



## Notes

- The drilled hole must be treated with epoxy compound;
- Hydrocord™ UKP **should not support** the pipe;
- The pipe must be centered and fixed on special pipe supports.


## Materials

Annular space seal Hydrocord™ UKP can be made of the following materials:

1. EPDM (Standard);
2. Oil and petrol resistant rubber (Optional);
3. Food grade rubber (Optional);
4. High temperature silicone rubber (Optional);


## Installation

1. Clean the hole (sleeve, drilled hole, case, etc.) and pipe;
2. Check the pipe and hole diameters and compare with the seal diameters;
3. Install Hydrocord™ UKP on the pipe (for the Split version - close and assemble the seal on the pipe);
4. Put the seal into the hole. The nuts of the tightening bolts must be directed towards the installer. (It is recommended to install the seal in such a way to provide access to the tightening nuts during the building operation);
5. Tighten the tie bolts in a star pattern using a torque wrench(as it is shown below). The tightening torque must be in accordance with the table below. Each bolt must be tightened in several steps until the required torque is reached, several steps are required;
6. It is allowed to mount the seal on pipes that are installed with a longitudinal slope of up to 30 (or up to 50‰).

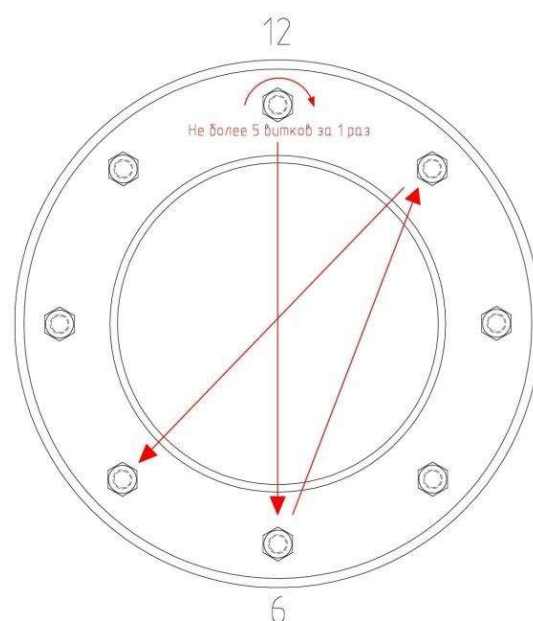


Maximum tightening torque, Nm		
Bolt diameter	Standard pipes	Thin-walled and pre-insulated (corrugated) pipes
M6	5 Nm	5 Nm
M8	10 Nm (For standard UKP and 2K type)	8 Nm (For standard UKP and 2K type)
	20 Nm (For customized version of UKP)	15 Nm (For customized version of UKP)
M10	30 Nm	22 Nm
M12	36 Nm	26 Nm

Bolt diameter	Tool dimensions for bolts
M6	10mm
M8	13mm
M10	17mm
M12	19mm

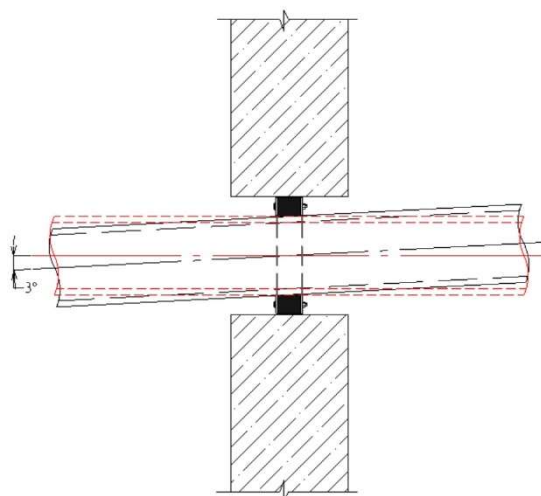



The annular space seal Hydrocord™ UKP can be used in various cases:



Download the set of standard solutions following the link in the section "Solutions for designers" of our website:



LLC "Plant of waterproofing materials "Hydrocord"  
Yekaterinburg, Krestinskogo St. 46a, office 401  
Phone: +7 (343) 222-73-22

Web: [hydrocord.ru](http://hydrocord.ru) E-mail: [ukp@gydromix.ru](mailto:ukp@gydromix.ru)



### Product info on the website