

# **UKP Standard**

hydrocord.ru TD №1-1.03



#### Product info

The annular space seal **Hydrocord<sup>TM</sup> UKP Standard** is the optimal product, which is used perfect sealing of penetrations for pipelines of various purposes (gas, water, sewage) and the cables from pressure and non-pressure groundwater. Compression plates are made of stainless steel.


The annular space seal **Hydrocord™ UKP** can be detachable - Split version, which is used for already installed pipes and when it is not possible to mount the seal from the pipe end.



For **Hydrocord™ UKP** products, EPDM rubber is used as standard material, and pressure plates are made of S304 stainless steel.

LLC "Plant of waterproofing materials "Hydrocord" Yekaterinburg, Krestinskogo St. 46a, office 401 Phone: +7 (343) 222-73-22

Web: hydrocord.ru E-mail: ukp@gydromix.ru



### **Application**

Hydrocord™ UKP seal is used for sealing and waterproofing penetrations of sewerage, water supply, heat supply and other networks through the enclosing structures of buildings (usually monolithic or prefabricated reinforced concrete walls and ceilings), as well as for sealing penetrations of networks in cases during trenchless laying of pipes.

The principle of seal operation is the expansion of the sealing element (rubber core), under the compressive force of the pressure steel plates when tightening the bolts that unite the structure.

## **Advantages**

- Proven water resistance up to 5 bar;
- Installation does not depend on ambient temperature;
- Instrumental quality control (Dynamometric wrench);
- Gas and waterproof;
- Quick installation;
- Durability;
- Can be customized to, any size and modifications;
- Modification for contact with oils and oil products (made of oil and petrol resistant rubber) is available;
- Application in contact with potable water is available (modification with food rubber);
- Modification with an extended operating temperature range (from -60°C to + 200°C) made of silicone rubber is available.





# **UKP Standard**

hydrocord.ru TD Nº1-1.03

### **Notes**

- The drilled hole must be treated with epoxy compound;
- Hydrocord<sup>™</sup> UKP should not support the pipe;
- The pipe must be centered and fixed on special pipe supports.

#### **Materials**


Annular space seal Hydrocord™ UKP can be made of the following materials:

- 1. EPDM (Standard);
- 2. Oil and petrol resistant rubber (Optional);
- 3. Food grade rubber (Optional);
- 4. High temperature silicone rubber (Optional);


### Installation

- 1. Clean the hole (sleeve, drilled hole, case, etc.) and pipe;
- 2. Check the pipe and hole diameters and compare with the seal diameters;
- 3. Install Hydrocord™ UKP on the pipe (for the Split version close and assemble the seal on the pipe);
- 4. Put the seal into the hole. The nuts of the tightening bolts must be directed towards the installer. (It is recommended to install the seal in such a way to provide access to the tightening nuts during the building operation);
- 5. Tighten the tie bolts in a star pattern using a torque wrench (as it is shown below). The tightening torque must be in accordance with the table below. Each bolt must be tightened in several steps until the required torque is reached, several steps are required;
- 6. It is allowed to mount the seal on pipes that are installed under a longitudinal slope of up to 30 (or up to 50%).

Bolt diameter	Tool dimensions for bolts
M6	10mm
M8	13mm
M10	17mm
M12	19mm



Maximum tightening torque, Nm		
Bolt diameter	Standard pipes	Thin-walled and pre- insulated (corrugated) pipes
М6	5 Nm	5 Nm
M8	10 Nm (For standard	8 Nm (For standard
	UKP and 2K type)	UKP and 2K type)
	20 Nm (For customized	15 Nm (For
	version of UKP)	customized version
		of UKP)
M10	30 Nm	22 Nm
M12	36 Nm	26 Nm



LLC "Plant of waterproofing materials "Hydrocord" Yekaterinburg, Krestinskogo St. 46a, office 401

Phone: +7 (343) 222-73-22

Web: hydrocord.ru E-mail: ukp@gydromix.ru






# **UKP Standard**

hydrocord.ru TD Nº1-1.03

### **Options for technical solutions**

The annular space seal Hydrocord™ UKP can be used in various cases:

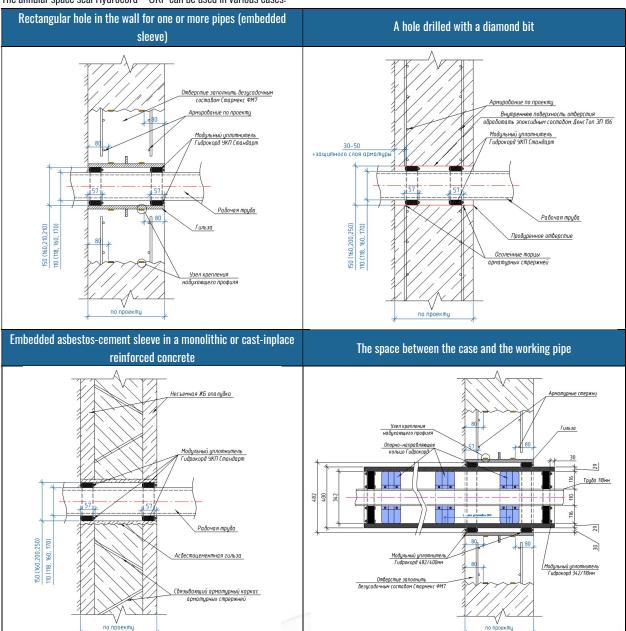

Upon request, the design department of Hydrocord LLC can develop technical solutions for your project. According to your initial data, our specialists will develop a project for sealing penetrations of networks with specifications and detailed nodes.

Download the set of standard solutions following the link in the section "Solutions for designers" of our website:



LLC "Plant of waterproofing materials "Hydrocord" Yekaterinburg, Krestinskogo St. 46a, office 401

Phone: +7 (343) 222-73-22

